

## **Quickmount III** Cold Laminator / Mounter

### **Easy to use Product...**

An affordable cold laminator/mounter

The **QUICKMOUNT III** eliminates the hassles and expense of outsourcing, and is much faster and easier than squeegeeing by hand. With heat laminators you are paying for expensive components needed to provide heat but not needed in cold laminating and mounting.




Abbildung zeigt den QUICKMOUNT III mit integriertem Rollenhalter

**QUICKMOUNT III** is designed to be a cold laminator, so you save money... but not at the expense of quality and durability. It is ruggedly built from steel and aluminium with a heavy duty motor. The large roller covering are extremely durable and will last for years.


- ✓ Automatically applies cold laminates
- ✓ Rolls down media to boards, smoothly and easily.
- ✓ Faster than squeegeeing by hand.
- ✓ Eliminates the hassles and expense of outsourcing.
- ✓ Costs thousands of dollars less than comparable laminators.
- ✓ Roll Holder System now included...
- ✓ New in **Quickmount III**... the front rolling of the silicone paper is now motorized...
- ✓ Sturdily built from steel and aluminum with a heavy duty motor.
- ✓ Large rollers cores for even pressure.
- ✓ Durable rollers coverings for a long life.



You do not need to be an expert to laminate.  
**QUICKMOUNT** makes it fast and easy.

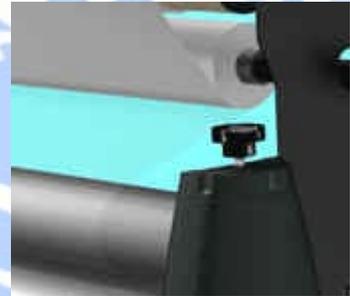

Two knobs set the height and pressure of the top roller.

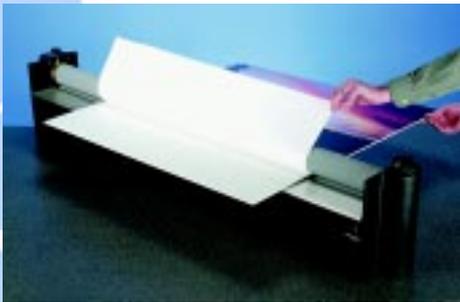

For mounting, it rolls down media to boards and other substrates, smoothly and easily

Picture show you the Quickmount II Model, the work principle is the same...

Optional footswitch provides hands free control of motor



**Specification Daige Quickmount III Roll-Laminator:**

	<b>QUICKMOUNT III 25</b>	<b>QUICKMOUNT III 38</b>	<b>QUICKMOUNT III 55</b>
<b>Roller widths</b>	25", 635 mm	38", 965 mm	55", 1400 mm
<b>Max. Board Thickness</b>	12 mm	12 mm	12 mm
<b>Speed</b>	2,2 m/min	2,2 m/min	2,2 m/min
<b>Roller thickness</b>	about 63,5 mm	about 63,5 mm	about 76,2 mm
<b>Electrical</b>	230 Volt, 50/60 Hz	230 Volt, 50/60 Hz	230 Volt, 50/60 Hz
<b>Dimensions B/H/L</b>	about 407/483/788 mm	about 407/483/1.188 mm	about 407/483/1.550 mm
<b>Weight</b>	about 25 kg	about 27 kg	about 46 kg
<b>Construction</b>	Steel und Aluminium	Steel und Aluminium	Steel und Aluminium

**Options:**

Footswitch      Footswitch for Quickmount III

